

KP30 SERIES

Features

- Setting pressure range : Compound (-100.0~100.0 kPa)
Vacuum (10.0~-101.3 kPa)
Positive (-0.100~1.000 MPa)
- 2 outputs & analog output (1~5V)
- Hysteresis adjustable
- Programmable pressure unit :
kPa、MPa、kgf/cm²、bar、psi、inHg、mmHg、mmH₂O




SPECIFICATIONS

TYPE	Compound	Vacuum	Positive
MODEL	KP30C	KP30V	KP30P
Rated pressure range	-100.0 ~ 100.0 kPa	0.0 ~ -101.3 kPa	0.000 ~ 1.000 MPa
Setting pressure range	-100.0 ~ 100.0 kPa	10.0 ~ -101.3 kPa	-0.100 ~ 1.000 MPa


FEATURES HIGHLIGHT

1 Programmable pressure unit

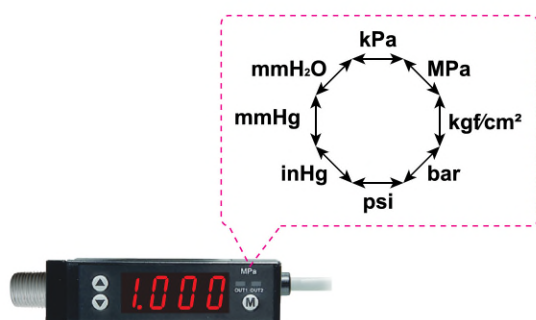


2 Key lock function

Key lock mode to prevent unauthorized adjustments
Press (M) more than 5 seconds to enter key lock mode
Use ▲ or ▼ to select key lock status



3 Analog output

2 outputs & analog output (1~5V)
Output range 1 to 5V, proportional to the pressure range

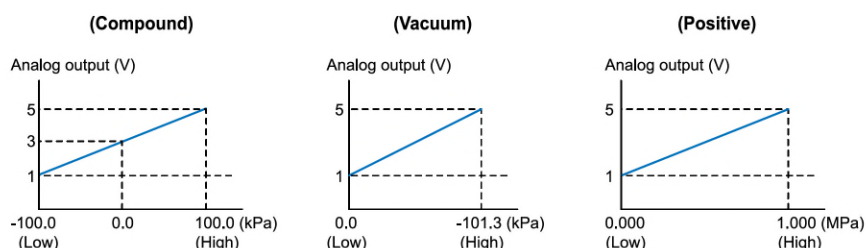

4 Hysteresis adjustable

Output hysteresis (H) is adjustable by user

